

MAGIC-6004

interM

2 WAY STEREO COMBINATION AMPLIFIER




FEATURES

- 4 CHANNEL OUTPUT AMPLIFIER
This model can use stereo 2 Zone-broadcasting System.
- 3 CD CHANGER
This model employs 3 CD changer of magazine type
During playing, rest 2 disc are changeable without interrupting the play.
Not only continues and repeat play but programmed play of 3 disc is possible for back ground music.
- DIGITAL TUNER
This model employs digital tuner has memory function of 24 broadcasting channels.
- AUTO REVERSE AND HIGH SPEED DUBBING
This model employs high reliable Auto reverse cassette deck for endless cassette play back and has the function of high speed dubbing as well as normal speed.
- SOFT 4 TONE CHIME WITH REMOTE CONTROL
This model employs 1chip digital chime IC.
- PRIORITY FUNCTION TO MIC INPUT
- DIGITAL ECHO FUNCTION
Mic line adopts digital echo by each line.
- 5 BAND STEREO GRAPHIC EQUALIZER
- LED DISPLAY
The model adopts 10 dot LED display by each channel.


SPECIFICATIONS

- ELECTRICAL *0dB=0.775Vrms
AMPLIFIER
 - Rated Output (1kHz, 1% THD).....60W/CHx4
 - Input Sensitivity
 - Mic 1, 2, 3.....-50dB/600Ω, BAL
 - Aux 1, A/V1.....-6dB/10Ω, UNBAL
 - Frequency Response.....100Hz~10kHz, ±1dB
 - T.H.D(at 1kHz).....Less than 1%
 - EQ Control(100Hz, 300Hz, 1k, 3k, 12k).....±10dB
- TUNER
 - Tuning Range.....AM:522~1611kHz
FM:87.5~107.9MHz
 - Antenna Input.....AM:Lead Ant., FM:75Ω
 - Usable Sensitivity.....AM:10uV, FM:3uV
- DECK
 - Trace System.....2 Trace Stereo
 - Frequency Response.....125Hz~6.3kHz
- CD
 - System.....Compact Disc Digital Audio Player
 - Frequency Response.....5Hz~20kHz
- GENERAL
 - Power Source.....AC 110V-240V, 50/60Hz
 - Power Consumption.....600W
 - Weight.....20kg
 - Dimensions.....420(W) × 266(H) × 310(D)mm

MAGIC-6004

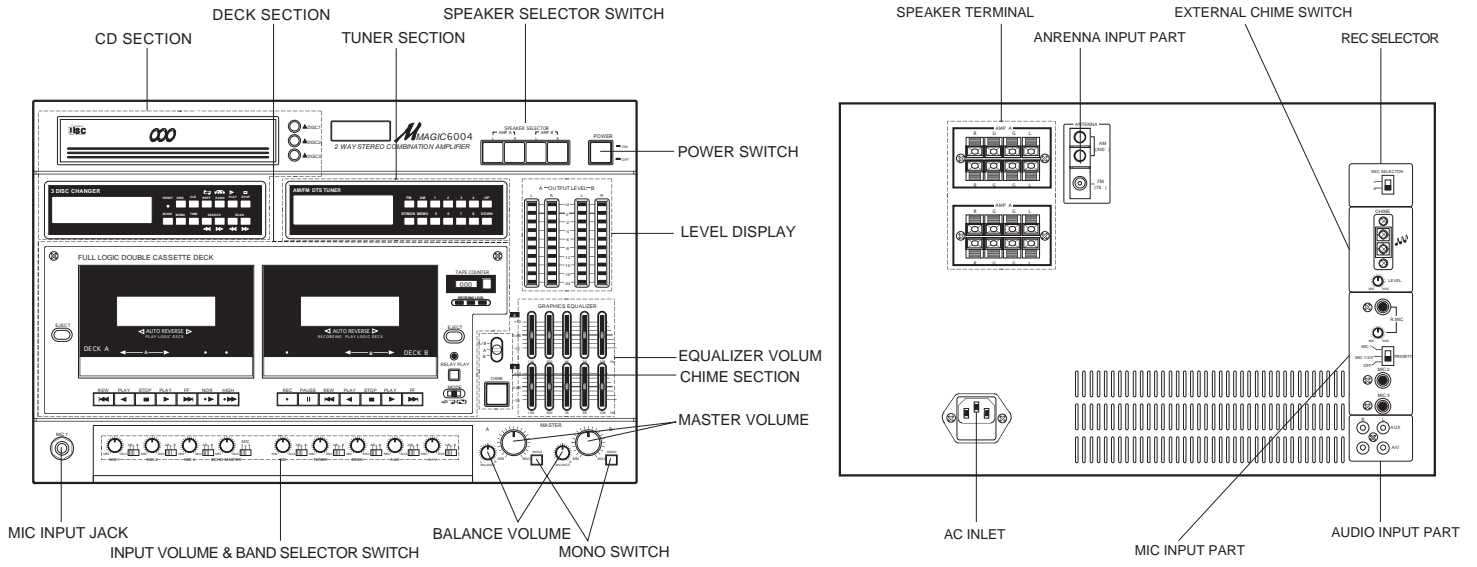

BLOCK DIAGRAM

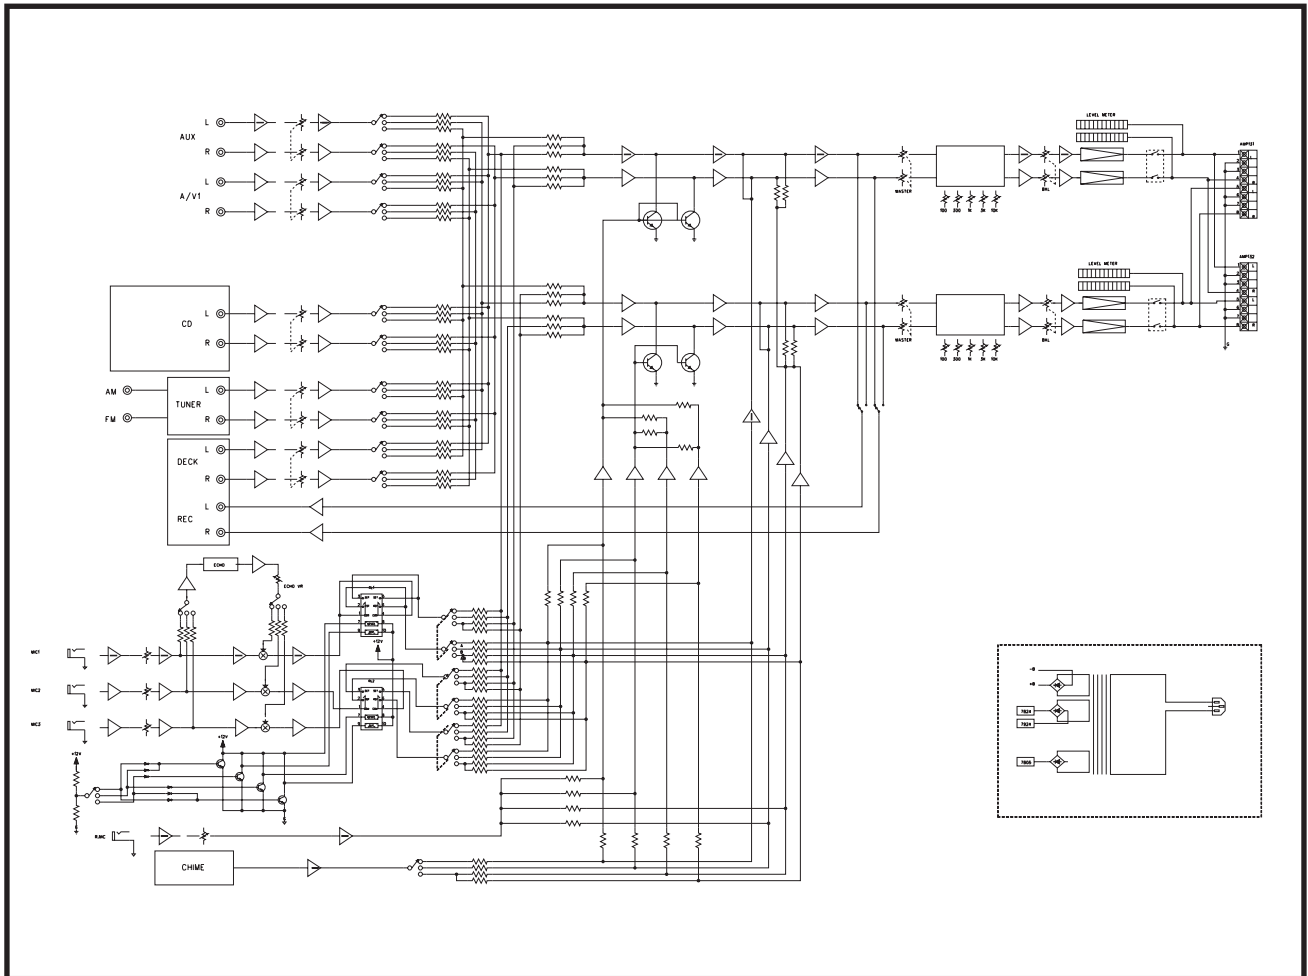

interM

OFFICE : 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA TEL : 82-2-2289-8140-8, FAX : 82-2-2289-8149
Home page : <http://www.inter-m.com> E-mail : export@inter-m.com

9047923110 B