

## PROGRAM DISTRIBUTOR




### FEATURES

- **PROGRAM DISTRIBUTION**  
The signal distributes from 1 channel input program to 6 channel output program for the convenient use of signal transmission.
- **INDECENT LEVEL ADJUSTMENT**  
Input and 6 channel output level is able to adjust independently, and each status of level is able to monitor with peak or signal LEDs on each channels.
- **TRANSFORMER BALANCED CIRCUIT(OPTION)**  
All input and output are designed with electronic balanced circuit and XLR connection, and line matching transformer is mountable optionally.

### SPECIFICATIONS

- **ELECTRICAL** \*0dB=0.775Vrms
  - Input Sensitivity/Impedance .....100mV/600Ω ,BAL
  - Input Level Adjustment .....-20dB
  - Output Level/Impedance .....+4dB/600Ω, BAL
  - Frequency Response .....20Hz~20kHz
  - T.H.D(at 1kHz Rated Output) .....Less than 0.1%
  - S/N .....Better then 75dB
  - Channels .....1 Input, 6 Output
- **GENERAL**
  - Power Source.....AC 110V-240V, 50/60Hz, DC 24V
  - Power Consumption .....8W
  - Weight .....3.8kg
  - Dimensions .....482(W)×44(H)×280(D)mm

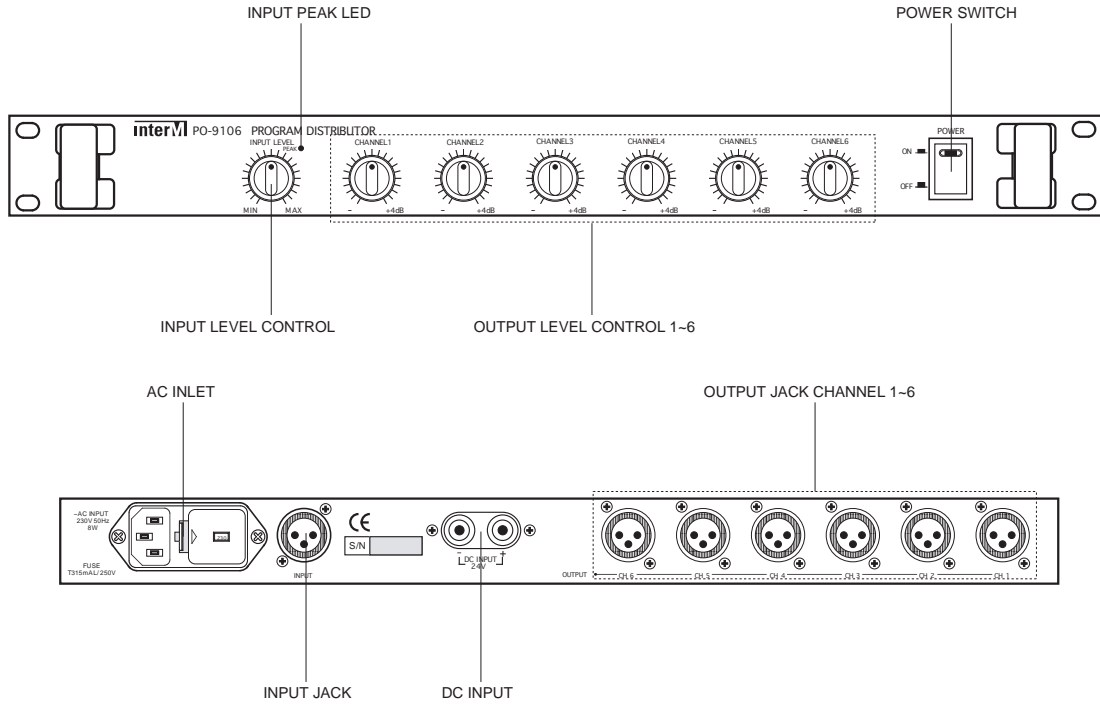

BLOCK DIAGRAM

