

POP-30/60/120



FULL LOGIC CASSETTE RECEIVER AMPLIFIER




FEATURES

- **30, 60, 120 WATT OUTPUT POWER**
This model can deliver very strong(POP-30:30W, POP-60:60W, POP-120: 120W)(RMS) output power at less than 1% THD.
- **VERSATILE AND CONVENIENT USE**
6 channels of input signals from MIC 1~3, AUX, TUNER, DECK call signs of 4 Tone Chime, Tone Control, speaker selector are incorporated for versatile and convenient use.
- **MUTING FOR PRIORITY**
MIC 1 and 4 TONE CHIME have priority to the other signal, you can adjust the mute level as adjusting volume of rear panel.
- **DIGITAL TUNER**
The total 30 memory address in system can memorize the frequency of broadcasting. You can use the desirable frequency conveniently.
- **FULL-LONG CASSETTE DECK**
This PA cassette receiver employs high reliable full-logic Auto-Reverse cassette deck for playback and recording.
- **CHIME WITH FOUR TONES**
You can conveniently use four tone chime before the announcement.

SPECIFICATIONS

- **ELECTRICAL** *0dB=0.775Vrms
 - Rated Output30W, 60W, 120W(RMS)
 - Input Sensitivity/Impedance
Mic 1-31mV/10kΩ(Mic 1-3 BAL 600Ω Optional)
AUX.....350mV/10kΩ
Line in1V/10kΩ
 - Frequency Response80Hz~20,000Hz
 - T.H.D (at 1kHz Rated Output)Less than 1%
 - S/N90dB
 - Tone Control(100Hz~10kHz)±12dB
 - Speaker Output/Impedance
.....POP-30:30W(11V/4Ω, 25V/21Ω,70V/63Ω,100V/33Ω)
POP-60:60W(15.5V/4Ω, 25V/10.5Ω,70V/82Ω,100V/166)
POP-120:120W(22V/4Ω, 25V/5.2Ω,70V/40Ω,100V/83)
- **GENERAL**
 - Power SourceAC 110V-240V, 50/60Hz
 - Power Consumption.....POP-30:105W
POP-60:132W
POP-120:235W
 - Weight.....POP-30:11.6kg
POP-60:12.6kg
POP-120:14.4kg
 - Dimensions.....420(W) ×132(H) ×320(D)mm

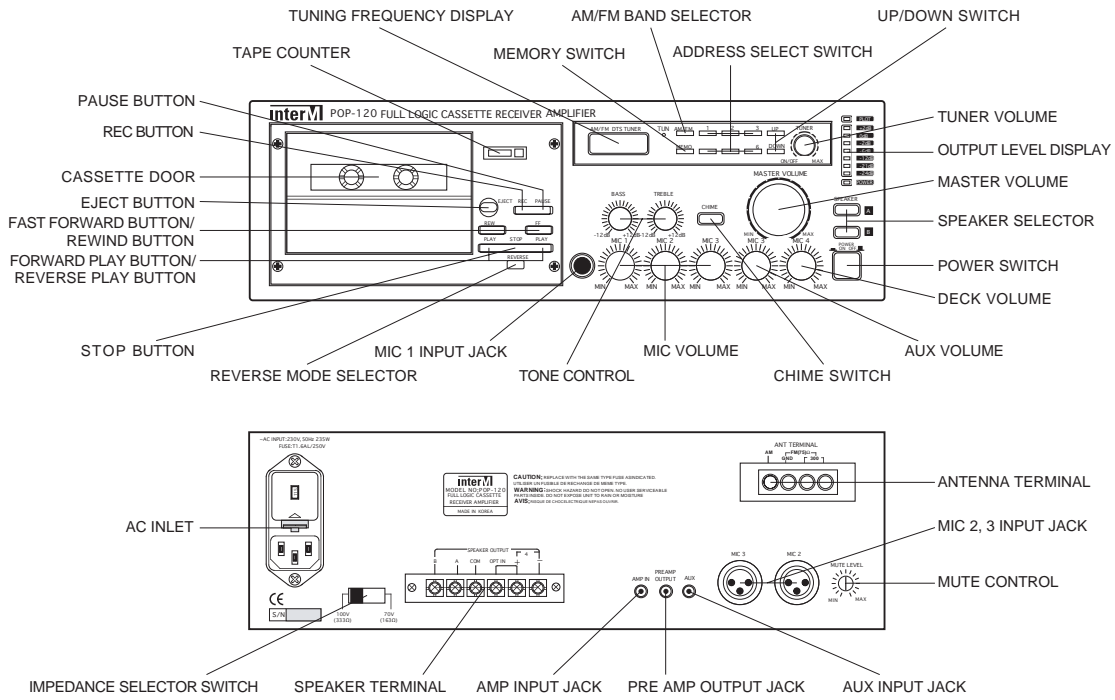

BLOCK DIAGRAM

