


■DESCRIPTION

The V-1051B is a microphone preamplifier module with compressor and programming function which designed for use with the VM series mixer power amplifiers and the mixerflame.

■SPECIFICATIONS

Power Requirement	24 V DC
Current consumption	40 mA
Input Sensitivity and Impedance	-60 dBV 600 Ω, balanced with compressor or 0 dBV 100 kΩ, balanced switchable
Output Level and Impedance	-20 dBV, 10 kΩ
Frequency Response	30 ~ 20,000 Hz ± 1dB
Speech Filter	-12 dB at 100 Hz
Distortion	Less than 0.3 % (f=1 kHz sine wave)
Noise Level	-124 dBV (20 Hz~20,000 Hz, 200 Ω terminated)
Indicator	In-use indicator (green LED)
Control	1 × slide volume control
Programming function	Highest priority, 1st-in-1st served priority Cascade priority, Speech filter Busy indication, Chime indication Mic enable function
Connections	Input : 5-pin DIN socket Output and power received : 10-pin card connector
Color	Black
Dimensions(W×H×D)	40 (1.57")×129 (5.08")×212 (8.35") mm
Weight	151 g (0.33 lb.)

■APPEARANCE

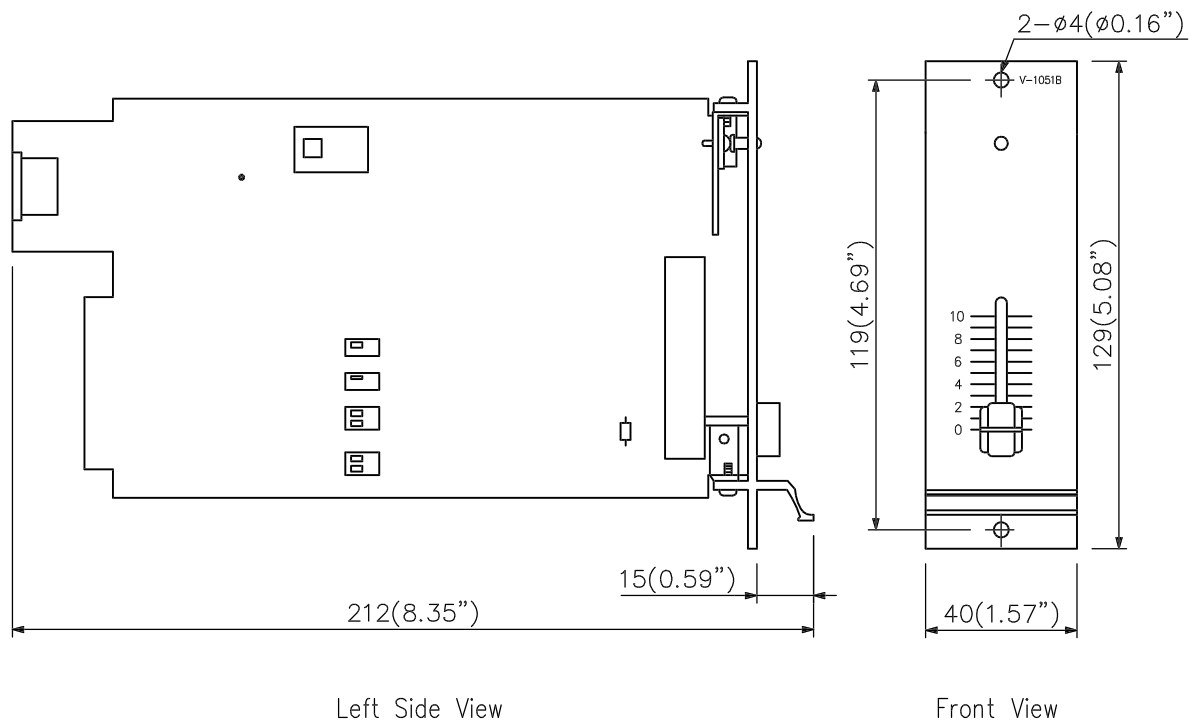

UNIT:mm SCALE:1/2