

## REMOTE AMP WITH ZONE SELECTOR




### FEATURES

- **SPEAKER LINE CONTROL**  
Speaker zone of PAM-240,360 can be control by RM-05.
- **ZONE CONTROL CIRCUITS**  
Speaker zones can be selected individually by means of the CHANNEL switches or altogether using the ALL CALL switch.
- **ANNOUNCEMENTS BY MICROPHONE**  
Unobtrusive and easy to use condenser type microphone which is highly sensitive and reproduces high clarity speech.
- **PRE-ANNOUNCEMENT CHIME**  
A four tone chime is incorporated for pre-announcement purposes. It is initiated by pressing the CHIME switch.
- **LED OUTPUT LEVEL INDICATION**  
The ten segment LED barograph display indicates the instantaneous signal output level of the amplifier.

### SPECIFICATIONS

- **ELECTRICAL** \*0dB=0.775Vrms
  - Output Level/Impedance ....+4dB(unit gain)/600Ω, BAL
  - MIC Input Sensitivity/Impedance.....-50dB/600Ω, BAL
  - Frequency Response .....20Hz~20kHz, -3dB
  - THD .....Less than 0.1%
  - S/N .....Better than 65dB
  - Speaker Control Terminal & Switch .....5CH
- **MIC (CMC-01) Specifications**
  - Type .....Condenser Microphone
  - Polar Pattern.....Unidirectional
  - Frequency Response .....100Hz~16,000Hz
  - Impedance .....Max 680Ω
  - Sensitivity(0dB=1V/0.1Pa at 1kHz) .....-47dB±3dB
  - Sensitivity Reduction .....With in -3dB at 1.0V
  - Current Consumption .....Max 0.5mA
  - S/N Ratio .....More than 60dB
  - Standard Power Supply .....DC 1.5V
  - Weight Goose Neck .....200g
- **GENERAL**
  - Power Source.....DC 24V(used by DIN connector)
  - Weight .....1kg(Without Microphone)
  - Dimensions.....195(W) ×60(H) ×205(D)mm

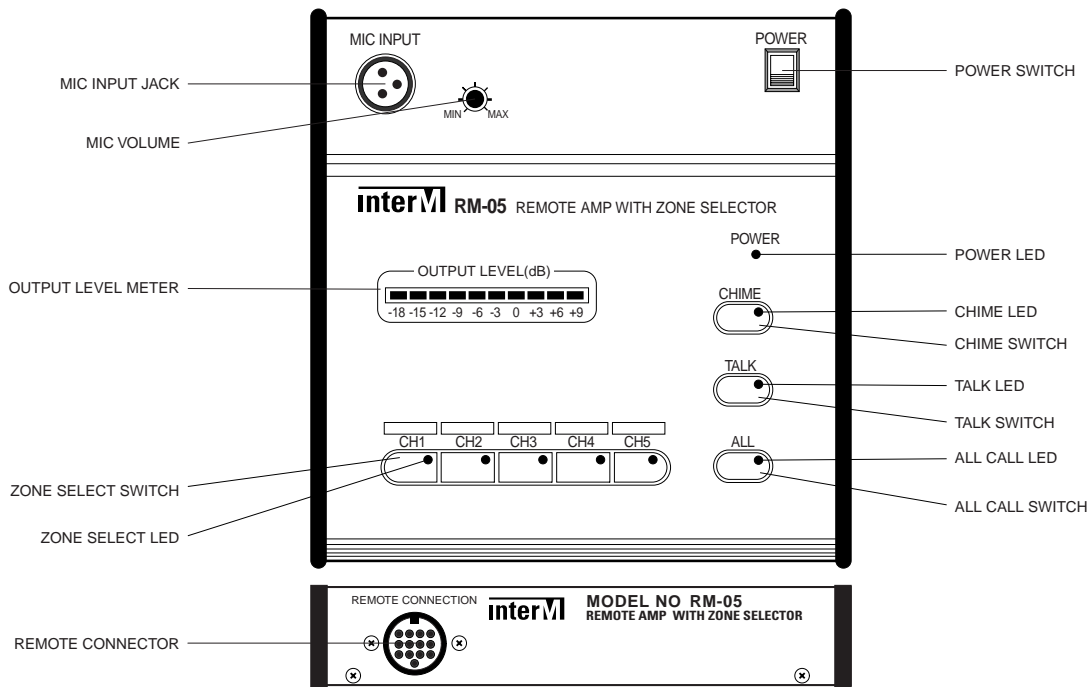

BLOCK DIAGRAM

