


## DESCRIPTION

The V-1018B is an alarm signal module can generate two types of chime signals and one alarm signal inconjunction with the Mixer Frame V-1000B or the VM Series Mixer-Power Amplifier.

## SPECIFICATIONS

Power Requirements	24 V DC
Current Consumption	Under 65 mA
Signals	Chime-1 and 2 : 8 tones (selectable) 4 chime speeds (selectable) Alarm : 8 tones (selectable) Alarm duration : "1-minute automatic stop" or "Continuous" (switchable)
Output Level	280 mV(p-p)
Output Impedance	10 kΩ
Indicators	1 × green LED (speech) 3 × red LEDs (Chime-1 and 2 and Alarm)
Volume Controls	1 for Chime-1/2 and Sine wave alarm (common) 1 for Alarm (except sine wave alarm)
Priority Order	(1) Stop (2) Alarm (3) Chime-1 (4) Chime-2
Connection	Indication output, Activation input and Power supply : 8-pin DIN socket Signal output and DC input : 20-pin card connector
Ambient Temperature	0 °C ~ +50 °C
Finish	Black
Dimensions(W×H×D)	40 (1.57")×129 (5.08")×212 (8.35") mm
Weight	175 g (0.39 lb.)

## APPEARANCE

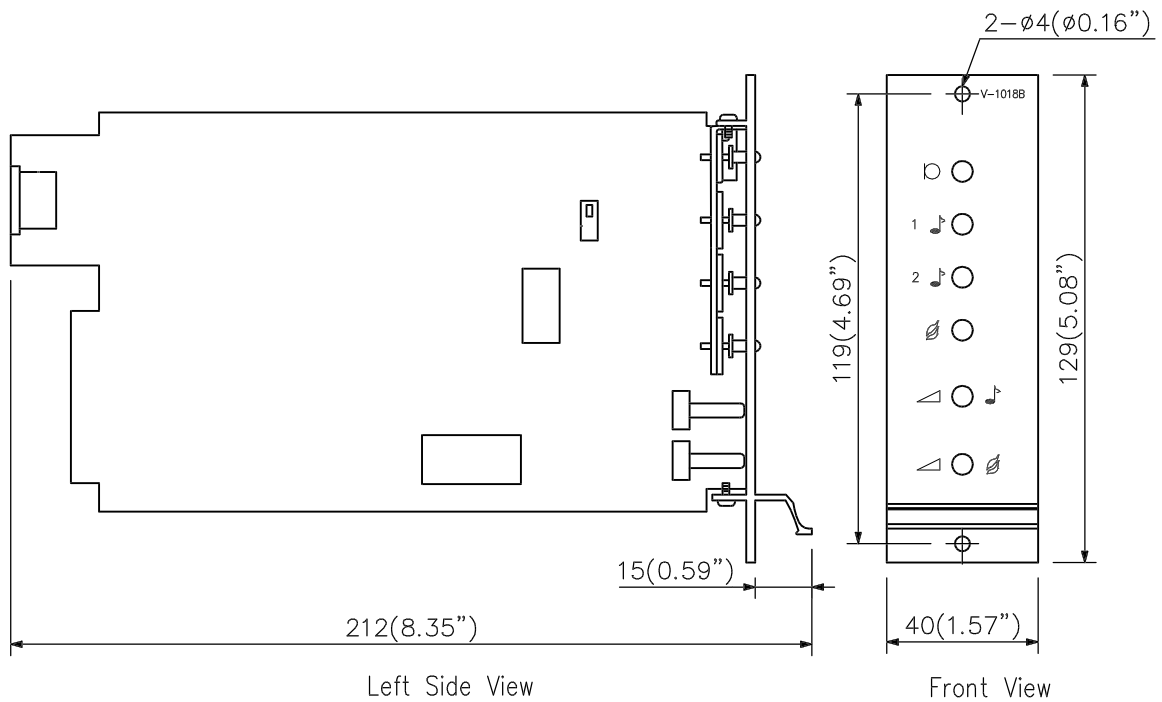

UNIT:mm SCALE:1/2