


DESCRIPTION

The V-1034B AM/FM Radio Tuner Module is designed for use with the "VM" mixer power amplifier or V-1000B mixer frame. The V-1034B is equipped with a digital display which shows the current radio band.

SPECIFICATIONS

Power Requirements	20 V DC ~ 24 V DC
Current Consumption	Max. 150 mA
Input	Antenna input : "F" type
Tuning Range	FM : 87.5 MHz ~ 108 MHz, (50 kHz increment) AM : 522 kHz ~ 1620 kHz, (9 kHz increment)
Sensitivity	FM : 2.5 μ V/98 MHz for 30 dB quieting AM : 20 μ V/999 kHz for 20 dB quieting
IF Frequency	FM : 10.7 MHz AM : 450 kHz
Antenna Impedance	75 Ω unbalanced
Tuning Control	Auto(Manual mode available)
Preset Frequencies	FM : 5, AM : 5
Memory Backup Period	7 days (after DC power off)
Output Level	-20 dBV/0dBV (switchable)
Output Impedance	-20 dBV : 10 k Ω unbalanced 0 dBV : 600 Ω unbalanced
Distortion	Less than 1%
S/N Ratio (at 20 Hz ~ 20,000 Hz)	FM : Better than 70 dB AM : Better than 45 dB
Color	Black
Dimensions(WXHXD)	40(1.57") x 129(5.08") x 219(8.62") mm
Weight	160 g (0.35 lb.)

APPEARANCE

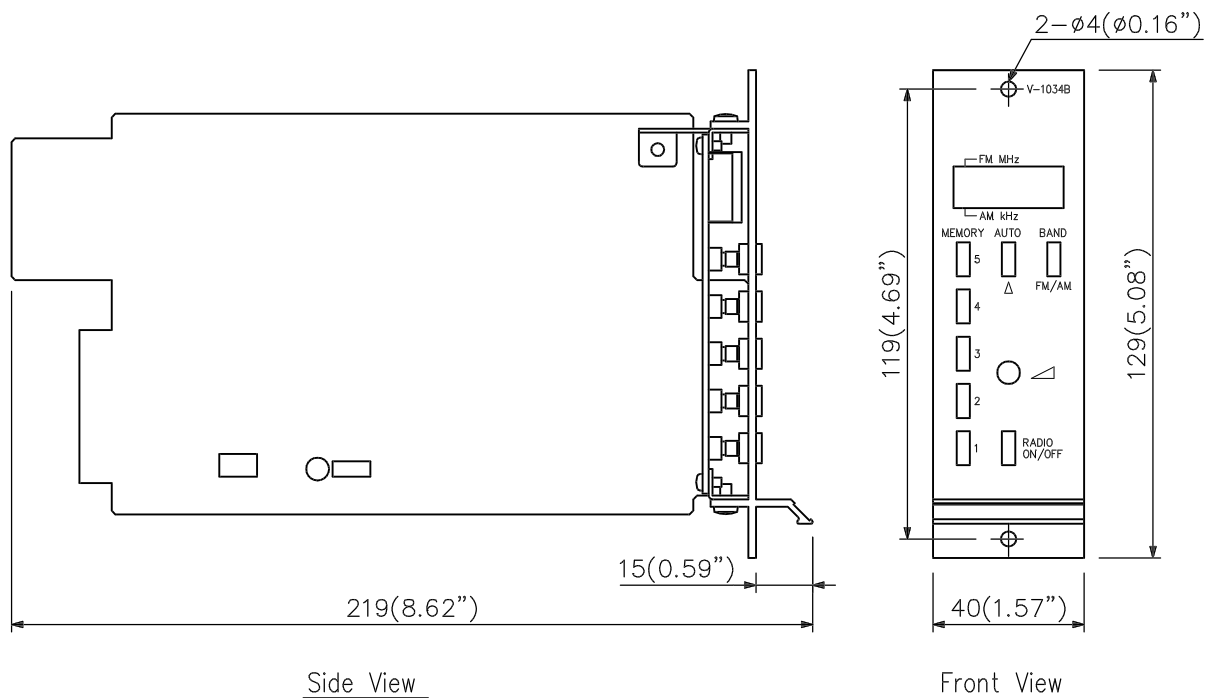

UNIT:mm SCALE:1/2