


■DESCRIPTION

The V-1069B is the data receiver to be used in conjunction with VR-1010 or VR-1020.

■SPECIFICATIONS

Power Requirements	24 V DC
Power Consumption	150 mA
Output Control	20 zones + all-call
Inputs	4 (0 dBV, 600 Ω, balanced)
Output (signal)	1 (0 dBV, 600 Ω, balanced)
Make-contact	20 individual calls, max. 40 mA DC
Chime	Internal : 4-tone chime, 2-tone chime, gong or 1-tone chime (selectable)
Indicator	4 green LEDs/ 1 red LED
Connection	44-pin card-edge connector (accessory)
Connectable Number of VR-1010 or VR-1020	Up to 4
Color	Black
Dimensions (W×H×D)	40(1.57") × 129(5.08") × 194.3(7.65") mm
Weight	220 g (0.49 lb.)
Accessories	44-pin card-edge connector.....1 Binding head taptite screw (3×10).....2

■APPEARANCE

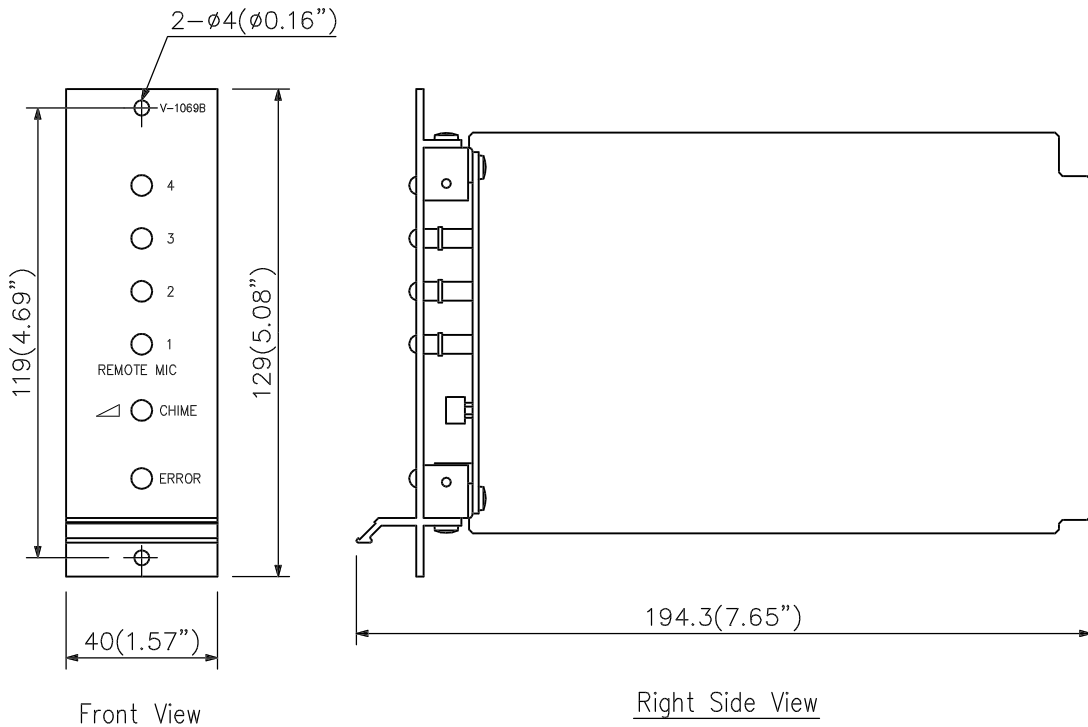

UNIT:mm SCALE:1/2