


DESCRIPTION

Used in conjunction with the V-1069 data receiver, the VR-1020 remote microphone permits broadcast to up to 20 zones plus all-call control.

SPECIFICATIONS

Power Requirements	24 V DC
Power Consumption	110 mA
Output	0 dBV, 600 Ω, balanced
Microphone	Gooseneck electret condenser mic with windscreen
AUX Input	-20 dBV, 100 kΩ, unbalanced
Chime	V-1069's internal chime : 4-tone chime, 2-tone chime, gong or 1-tone chime (selectable)
Output Control	20 zones + all-call
Finish	Metallic gold
Dimensions (WXHXD)	274(10.79") × 62(2.44") × 155(6.10") mm, without microphone
Weight	1.3 kg (2.87 lb.)
Accessories	Microphone EM-850B(S).....1 Cord clamp.....1 Zone identification labels.....4
Connection cables	1 twin shielded cable and 2 twisted pair cables (Line resistance : 10 Ω or less, Cable length : 200 m or less Outer diameter : 10 mm or less)

APPEARANCE

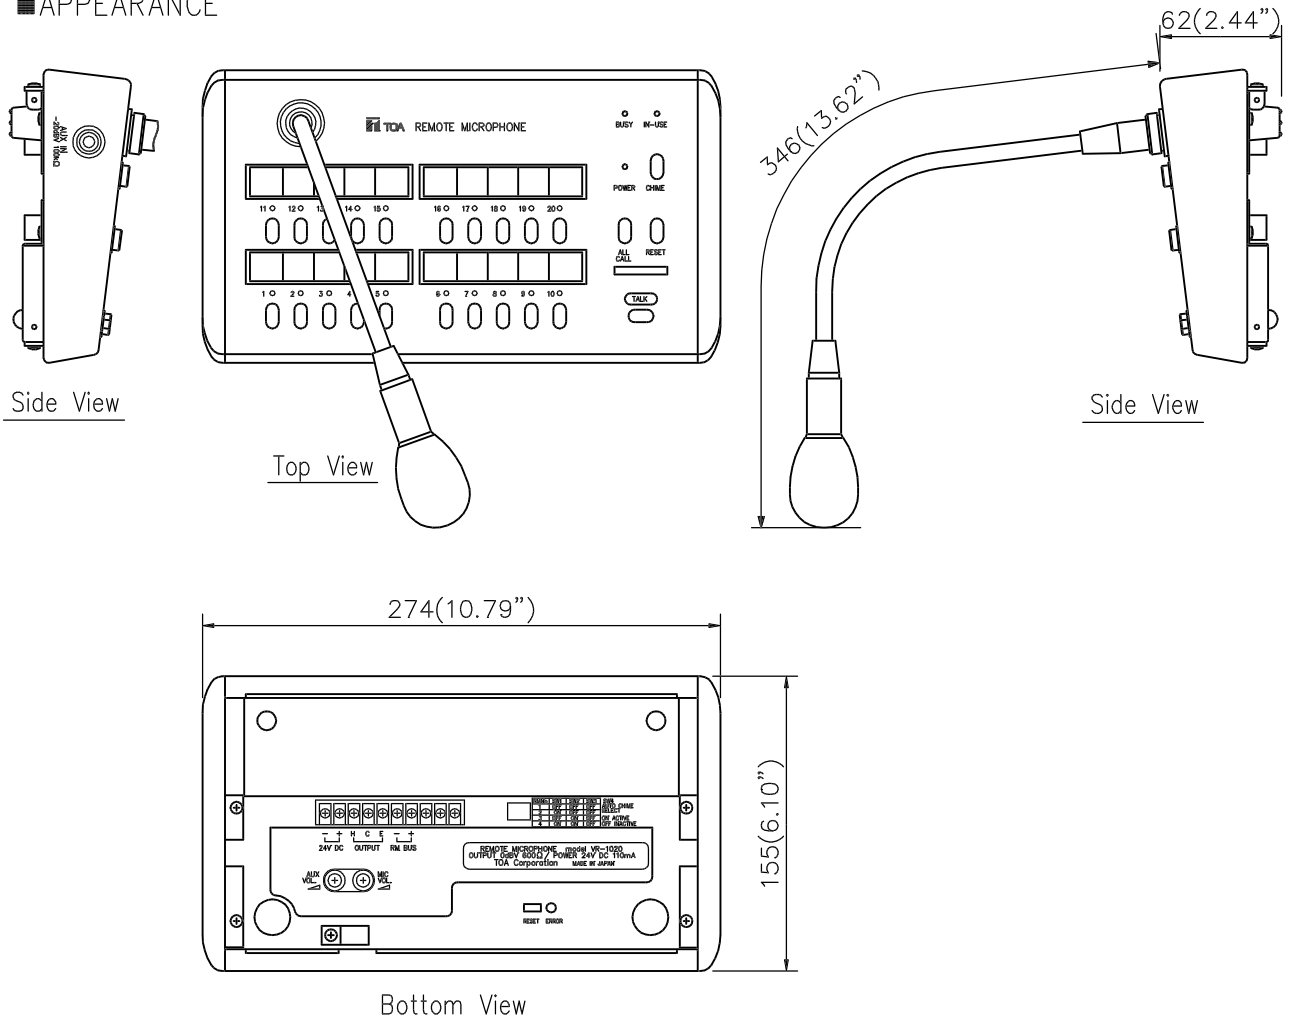

UNIT:mm SCALE:1/4

Bottom View