

## SPEAKER SELECTOR




### FEATURES

- **16 ZONE SELECTOR**  
16 channel selector switches are provided to enable you to select 16 zone speakers individually.
- **ALL AND GROUP SELECTION**  
By using ALL, Group 1, and Group 2 selector, you can drive the speakers of all zones or each group of 8 channels.
- **REMOTE CONTROL**  
Remote control of ALL, Group 1, Group 2 is available by using remote control terminals on the rear panel.
- **LED INDICATOR**  
Each LED of selector switch is for easy checking the status, and timer, remote LEDs on the front panel is for status indication of rack system.

### SPECIFICATIONS

- **ELECTRICAL**
  - Speaker Selection .....16 Channels, All Group 1(CH1~CH8), Group 2(CH9~CH16)
  - Indicator .....16 Channels, All Group 1, Group 2, Timer, Remote
  - Current Rating .....1A
  - Channel Selector .....1A
  - All, Group 1, Group 2 .....16A, 8A
- **GENERAL**
  - Power Source .....DC 24V
  - Weight .....3.6kg
  - Dimensions.....482(W)×44(H)×280(D)mm

# PS-9116

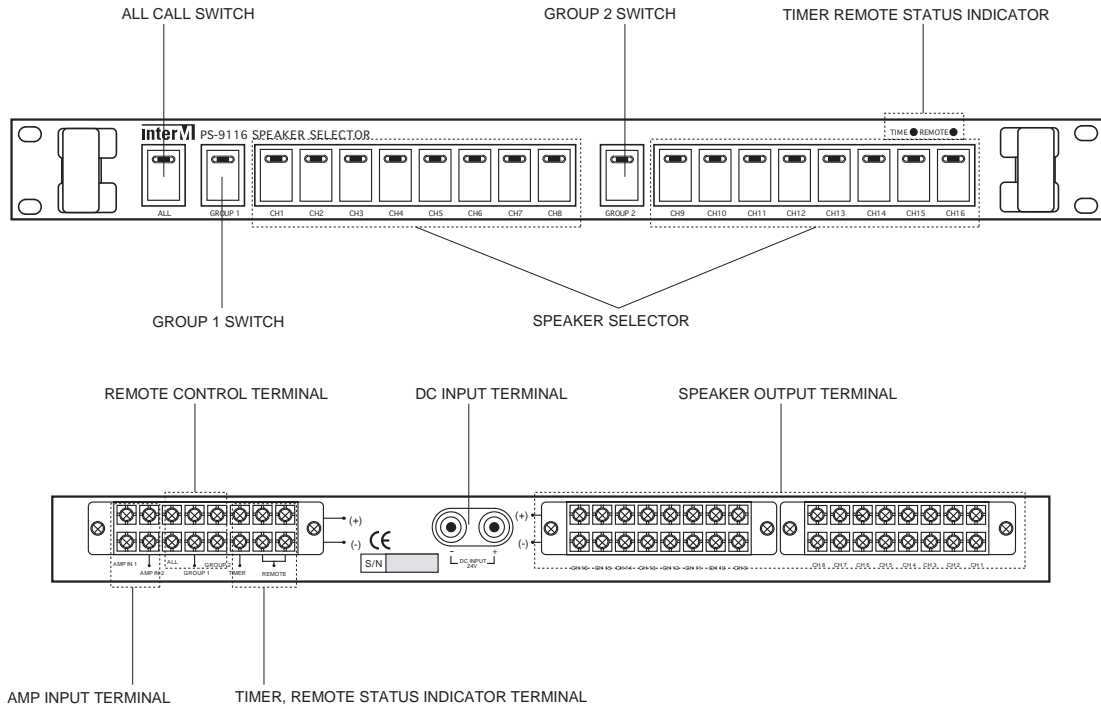

## BLOCK DIAGRAM

