


CEILING SPEAKER

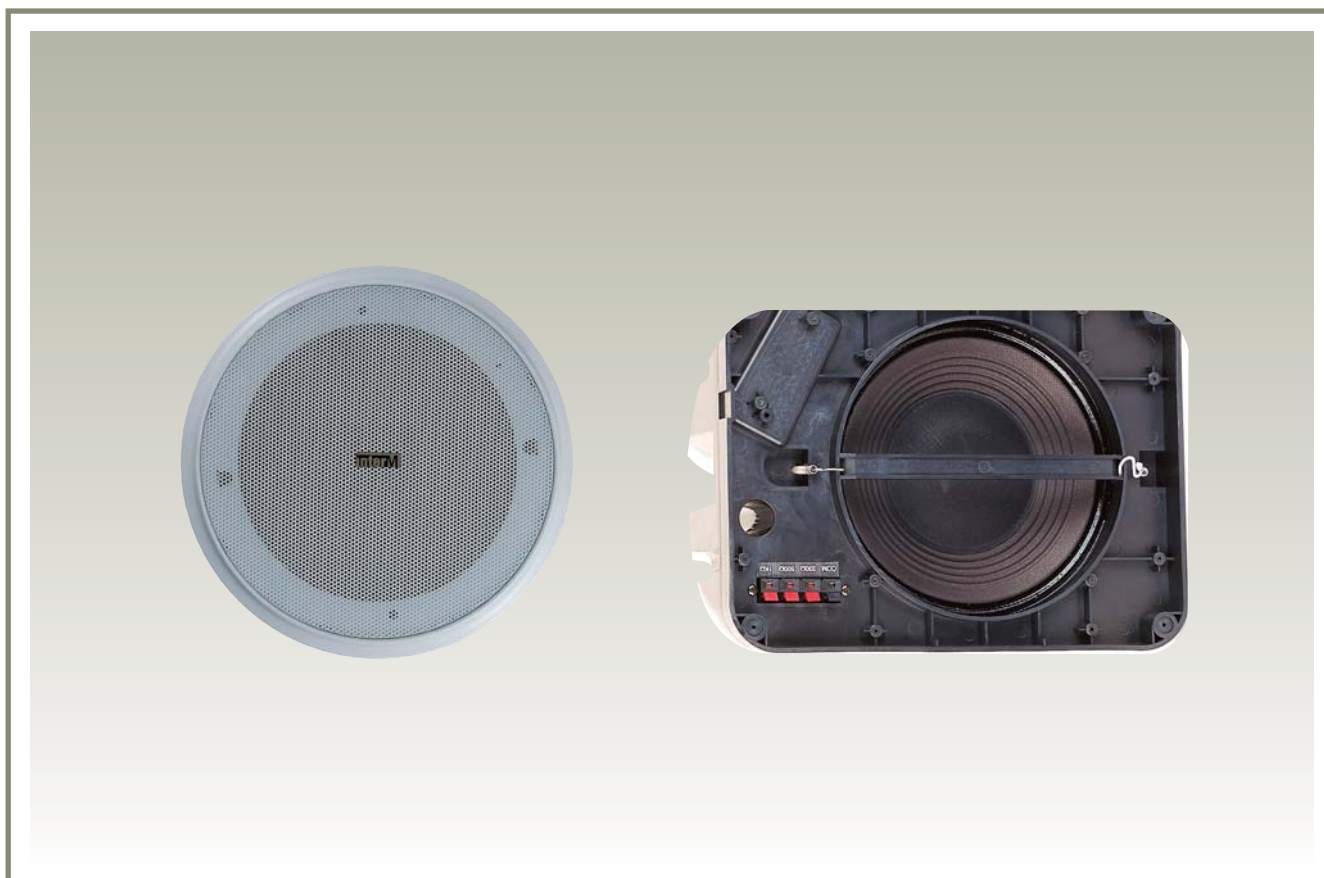



FEATURES

- **VERSATILE MODELS**
The ceiling speakers are designed with steel ABS resin.
- **EASY INSTALLATION**
You can install easily by using provided spring and steel cover.
- **EFFICIENCY FOR P.A SYSTEM**
Marching transformer is incorporation for high efficiency of P.A use.
- **2 WAY SYSTEM**
These speakers are designed coaxial type unit.
Sound is clear and smooth.

SPECIFICATION

- **ELECTRICAL** *0dB=0.775Vrms
 - MS-15
 - Rated Input15W
 - Impedance 660Ω, 1kΩ, 2kΩ
 - Frequency Response250Hz-17kHz
 - SPL(1m/1W)97dB
 - MS-30
 - Rated Input30W
 - Impedance 330Ω, 500Ω, 1kΩ
 - Frequency Response220Hz-18kHz
 - SPL(1m/1W)97dB
 - Material of CaseAluminum
 - BodyABS RESIN
 - CoverPAINTED STEEL
- **GENERAL**
 - WeightMS-15: 2.5kg
MS-30: 3.5kg
 - Dimensions220(W) × 286(H) × 139(D)mm

MS-15/30 TERMINAL CONNECTION

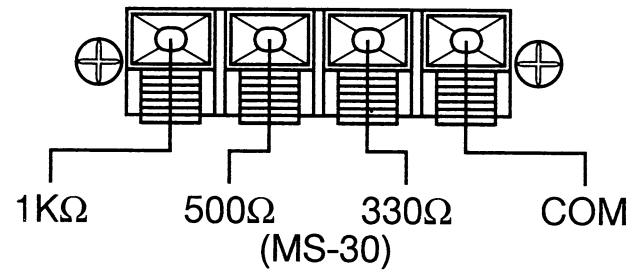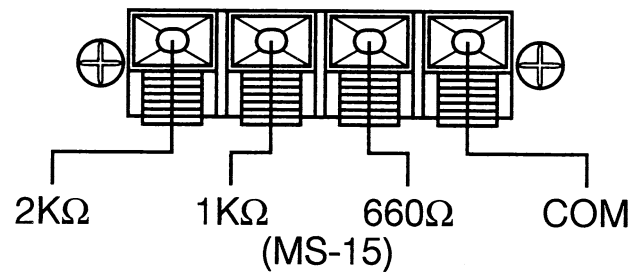

interM

OFFICE : 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA TEL : 82-2-2289-8140~8, FAX : 82-2-2289-8149
Home page : <http://www.inter-m.com> E-mail : export@inter-m.com

9047909520 B