

COMMERCIAL SOUND PRODUCT LINES



school



church



office building



auditorium & little theater



government & public offices





[CONTENTS

COMMERCIAL SOUND PRODUCT LINES

[Table Type

1

[Rack Type

4

[Speakers

10

[Microphones

11

PA-920/935 AMPLIFIER



- [Output Power : PA-920 : 20W(RMS) < 1% THD
PA-935 : 35W(RMS) < 1% THD
- [Input : Mic 1, Mic 2(AUX 1), Mic 3(AUX 2), Telephone Input
- [2 Band Equalizer : ± 10 dB
- [Muting for Priority : Mic1, Telephone, Adjustable Independently
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : PA-920 : 50W, PA-935 : 80W
- [Weight : PA-920 : 3.5kg, PA-935 : 4.4kg
- [Dimensions : 290(W)X76(H)X196(D)mm

PA-1000B/1000BR AMPLIFIER/RECEIVER



- [Output Power : 30W(RMS) < 1% THD
- [Input : Mic 1, Mic 2, AUX, Telephone Input
- [Input Connectors : Mic : Balanced XLR and 1/4 " Telephone Input : Screw Terminal
- [2 Band Equalizer : ± 10 dB
- [Muting for Priority : Mic 1, Telephone, Adjustable Independently
- [Remote Controllable 4 Tone Chime for Announcement Notice
- [Line IN/OUT for Additional Mixer or Amp link
- [PA-1000BR Only : AM/FM Digital Tuner with 30 Programmable Preset Memory with Music on Hold
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : 80W
- [Weight : PA-1000B : 4.6kg, PA-1000BR : 4.8kg
- [Dimensions : 300(W)X88(H)X260(D)mm

A-60/120 PUBLIC ADDRESS AMPLIFIER



- [Output Power : A-60 : 60W(RMS) < 1% THD
A-120 : 120W(RMS) < 1% THD
- [Input : Mic1-3(1/4" Balanced), AUX1-2
- [2 Band Equalizer : ± 12 dB
- [Muting for Priority : Mic 1
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : A-60 : 75W, A-120 : 105W
- [Weight : A-60 : 8.9kg, A-120 : 10.3kg
- [Dimensions : 420(W)X88(H)X320(D)mm

PA-2000/4000 AMPLIFIER



- [Output Power : PA-2000 : 60W(RMS) < 1% THD
PA-4000 : 120W(RMS) < 1% THD
- [Input : 6 Balanced with Adjustable Sensitivity
Option : XLR, 1/4", RCA, Screw Terminal
Telephone Input : Screw Terminal
- [Muting for Priority : CH1, 2, Chime & Siren, Telephone Input Adjustable
- [5 Band Equalizer : 100, 330Hz, 1, 3.3, 10kHz ± 12 dB
- [Remote Controllable 4 Tone Chime for Announcement and Siren
- [Line IN/OUT for Additional Mixer or Amp Link
- [5 Individual Speaker Zone Selector and All Call
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : PA-2000 : 150W, PA-4000 : 300W
- [Weight : PA-2000 : 10kg, PA-4000 : 12kg
- [Dimensions : PA-2000 : 420(W)X100(H)X320(D)mm
PA-4000 : 420(W)X133(H)X320(D)mm

E
P
Y
T
E
L
B
A
T

- Output Power : PAM-60 : 60W(RMS) < 1% THD
PAM-120 : 120W(RMS) < 1% THD
- Input : 6 Balanced with Adjustable Sensitivity
Option : XLR, 1/4", RCA, Screw Terminal, Tuner, CD Player, Deck
Telephone Input : Screw Terminal
- 2 Band Equalizer : ±12dB
- Muting for Priority : CH1, 2, Chime, Telephone Input Adjustable
- Remote Control : 4 Tone Chime for Announcement
- Line IN/OUT for Additional Mixer or Amp link
- 5 Individual Speaker Zone Selector and All Call
- Power Source : AC 100V-240V, 50/60Hz, DC 24V
- Power Consumption : PAM-60 : 150W, PAM-120 : 300W
- Weight : PAM-60 : 11.4kg, PAM-120 : 13.5kg
- Dimensions : 420(W)X132(H)X360(D)mm

PAM-60/120 AMPLIFIER



- Output Power : PAM-240 : 240W(RMS) < 1% THD
PAM-360 : 360W(RMS) < 1% THD
- Input : 6 Balanced with Adjustable Sensitivity
Option : XLR, 1/4", RCA, Screw Terminal, Tuner, CD Player, Deck
Telephone Input : Screw Terminal
- 3 Band Equalizer : ±12dB
- Muting for Priority : CH1, 2, Chime, Telephone Input Adjustable
- Remote Chime : 4 Tone Chime for Announcement
- Remote Speaker Control used for External Remote Amplifier
- Line IN/OUT for Additional Mixer or Amp link
- 5 Individual Speaker Zone Selector and All Call
- Power Source : AC 100V-240V, 50/60Hz
- Power Consumption :
PAM-240(230V-240V): 240W, (100V-120V): 250W
PAM-360(230V-240V): 300W, (100V-120V): 380W
- Weight : PAM-240 : 11kg, PAM-360 : 13kg
- Dimensions : 420(W)X132(H)X360(D)mm

PAM-240/360 AMPLIFIER



- Speaker zone of PAM-240/360 can be control by RM-05
- Zone Control Circuits
- Announcements By Microphone
- Pre-announcement Chime
- LED Output Level Indication
- Power Source : DC 24V(used by DIN connector)
- Weight : 900g(Without Microphone)
- Dimensions : 194(W)X60(H)X205(D)mm

RM-05 REMOTE CONTROL AMPLIFIER



- PAM Series Digital Tuner Module with 30 Programmable Preset
- Music on Hold Signal

PAM-T TUNER



- PAM Series Deck Module
- Front Loading Type Auto Reverse Cassette Deck

PAM-D CASSETTE DECK



- PAM Series CD Module
- Function : Random Play, Music Scan, Time Counter, Repeat, Forward, Reverse Track, Forward, Music Search

PAM-CDA CD PLAYER



POP-30/60/120 CASSETTE RECEIVER



- [Output Power : 30W, 60W, 120W(RMS) <1% THD
- [Input : Mic 1(1/4" Balanced), Mic 2, 3(XLR, Balanced), AUX, Tuner, Deck
- [2 Band Equalizer : ± 12 dB
- [4 Tone Chime for Announcement
- [2 Speaker Selector
- [AM/FM Digital Tuner with 30 Programmable Preset
- [Full-Logic Recording Playback Auto-Reverse Cassette Deck
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : POP-30 : 105W, POP-60 : 132W, POP-120 : 235W
- [Weight : POP-30 : 11.6kg, POP-60 : 12.6kg, POP-120 : 14.4kg
- [Dimensions : 420(W)X132(H)X320(D)mm

ACR-60/120 COMPACT DISC RECEIVER



- [Output Power : 60W, 120W(RMS) <1% THD
- [Input : Mic 1(1/4" Balanced), Mic 2, 3(XLR, Balanced), AUX, Tuner, CD
- [2 Band Equalizer : ± 12 dB
- [4 Tone Chime for Announcement
- [2 Speaker Selector
- [AM/FM Digital Tuner with 30 Programmable Preset
- [Muting for Priority : CH1, Chime
- [3 CD Changer with 24 Programmable Preset
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : ACR-60 : 85W, ACR-120 : 120W
- [Weight : ACR-60 : 13kg, ACR-120 : 14.5kg
- [Dimensions : 420(W)X132(H)X320(D)mm

**SYSTEM-2120/2240
MULTI P.A. COMBINATION AMPLIFIER**



- [Output Power : SYSTEM-2120 : 120W(RMS) <1% THD
SYSTEM-2240 : 240W(RMS) <1% THD
- [Input : 5 Balanced Mic and 2 AUX with Digital Sensitivity
- [Muting for Priority : Mic 1, 2 or All Mic Selectable
- [4 Tone Chime for Announcement
- [10 Individual Speaker Zone Selector and All Call
- [7 Band Graphic Equalizer : 63, 160, 400Hz, 1, 2.5, 6.3, 16kHz
- [Built-In Monitor Speaker with Attenuator
- [3 CD Changer with 24 Programmable Preset
- [AM/FM Digital Tuner with 32 Programmable Preset
- [Auto-Reverse Logic Cassette Deck with High Speed Dubbing
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : SYSTEM-2120 : 300W, SYSTEM-2240 : 470W
- [Weight : SYSTEM-2120 : 24kg, SYSTEM-2240 : 25kg
- [Dimensions : 420(W)X266(H)X310(D)mm

**MAGIC-6004
2 WAY STEREO COMBINATION AMPLIFIER**



- [Output power : 60W(RMS)/4 Ω \times 4 <1% THD
- [Input : Mic 1, 2, 3 with Digital Echo, AUX, AV input
- [Channel with zone Selector Switch
- [3 CD Changer with 24 Programmable Preset
- [AM/FM Digital Stereo Tuner with Programmable Preset
- [Full Logic Auto-Reverse Double Cassette Deck
- [4 Tone Chime for Announcement
- [5 Band Stereo Graphic Equalizer
- [Muting for Priority : Mic 1 or 2 or 3 or OFF
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : 600W
- [Weight : 20kg
- [Dimensions : 420(W)X266(H)X310(D)mm

**OT-6004
OUTPUT TRANSFORMER UNIT**



- [OT-6004 Transforms the 4 ohm Output of the MAGIC-6004 to a 25V, 70V or 100V Level for use with High Impedance Speakers
- [4 Independent Channels Allow for 4 Mono or 2 Separate Stereo Zones
- [2 Space Rack Mountable Format
- [Weight : 11.5kg
- [Dimensions : 420(W)X88(H)X310(D)mm

E
P
Y
T
E
B
L
A
T

E

[Simultaneous Monitoring for 8 CH Output Level by LED Meter
 [Monitor Speaker with Attenuator (0, -6, -12, -18, -24dB, OFF)
 [Power Source : DC 24V
 [Weight : 3.5kg
 [Dimensions : 482(W)X88(H)X280(D)mm

PM-9208 MONITOR PANEL

CE



P

[In/Out Channel : 5 Input, 4 Output by Balanced XLR
 [ON/OFF Time Control, 2 Switched AC Outlet
 [Auto Weekly Memory and Clear
 [Built-In 11 Melody and 15 Voice File by VF-9104
 [Maximum Memory(Voice) : 1 Minute
 [Protect & Back-Up Function
 [Power Source : AC 100V-240V, 50/60Hz, DC 24V
 [Power Consumption : 18W
 [Weight : 4.5kg
 [Dimensions : 482(W)X88(H)X280(D)mm

PW-9242A WEEKLY PROGRAM TIMER

NEW

CE



Y

[Record Input : Mic, AUX, CD
 [Recording Time : maximum 8 minutes.
 [Extended Memory : MP3 32M byte
 [Various Functions : Record, Playback, All Playback, Repeat,
 Execute, Stop, Del, All Del, Key Protection
 [Control by the timer(our model PW-9242V)
 [Power Source : AC 100V-240V, 50/60Hz, DC 24V
 [Power Consumption : 4W
 [Weight : 3.5kg
 [Dimensions : 482(W)X44(H)X280(D)mm

VF-9104A VOICE FILE

NEW

CE



T

[30 Programmable Preset, Auto Scan
 [Sensitivity : FM : 2 μ V, AM : 11 μ V
 [FM Mute Switch
 [Power Source : AC 100V-240V, 50/60Hz, DC 24V
 [Power Consumption : 14W
 [Weight : 3.5kg
 [Dimensions : 482(W)X44(H)X280(D)mm

PT-9107 DIGITAL TUNER

CE



K

[Relay Playback, Auto Music Search,
 Normal & High Speed Synchro Dubbing
 [Full Logic Auto-Reverse Double Cassette Deck with REC Level Control
 [Blank Skip, Blank Recording Available
 [Power Source : AC 100V-240V, 50/60Hz, DC 24V
 [Power Consumption : 22W
 [Weight : 4.5kg
 [Dimensions : 482(W)X132(H)X280(D)mm

PC-9335 DOUBLE CASSETTE DECK

CE



C

[5 DISC CD CHANGER
 [Direct Track Selection
 [Intelligent Disc Scan
 [32 Track Program Memory
 [20 bit, 8 times Oversampling Digital Filter
 [3 Mode Random Playback
 [Power Source : AC 100V-240V, 50/60Hz
 [Power Consumption : 12W
 [Weight : 7.1kg
 [Dimensions : 482(W)X132(H)X389(D)mm

CDC-2050 MULTIPLE COMPACT DISC PLAYER

CE



A

R

CDC-9230 3 CD CHANGER



E

- [Continuous and Repeat play, Programmed Play
- [Maximum 24 Programming
- [3 Beam Tracking Servo and high Density 1 bit D/A Converter
- [Two Discs can be Changed Whilst a Third Disc is Playing
- [Power Source : AC 100V-240V, 50/60Hz, DC 24V
- [Power Consumption : 20W
- [Weight : 6kg
- [Dimensions : 482(W)X88(H)X380(D)mm

PP-9113 PRE-AMPLIFIER



P

- [Input : 6 Mic, Phono, CD, Deck, Tuner, AUX, Chime & Siren, Mixer
- [Balanced XLR for Mic Input and Balanced XLR Output
- [Mic 1/2, Chime & Mixer Priority Muting
- [Signal LED on Each Control Knob
- [Power Source : AC 100V-240V, 50/60Hz, DC 24V
- [Power Consumption : 9.5W
- [Weight : 5kg
- [Dimensions : 482(W)X44(H)X280(D)mm

PP-9213 PRE-AMPLIFIER



Y

- [Input : 6 Mono, 3 Stereo, Tone Control on each channels
- [Output : 2 Sub Outputs, Main Output, Rec Output, and Insert
- [4 Band EQ
- [2 Priority Inputs
- [+18V Phantom Power
- [Power Source : AC 100V-240V, 50/60Hz, DC 24V
- [Power Consumption : 10W
- [Weight : 5kg
- [Dimensions : 482(W)X88(H)X280(D)mm

T

PP-9214 PRE-AMPLIFIER



K

- [Input : 8 Mono, 2 Stereo
- [Output : 2 Channel Out, REC
- [3 Band Equalizer
- [Output Selector Switch per Each Input Channel
- [+4, -10, -20dB Attenuator on Stereo Input
- [Muting for Priority : CH 1
- [+18V Phantom Power
- [Power Source : AC 100V-240V, 50/60Hz, DC 24V
- [Power Consumption : 9.8W
- [Weight : 12.8kg
- [Dimensions : 482(W)X88(H)X280(D)mm

C

LM-9414 4 BUS MIC LINE MIXER



A

- [Input Section :
 - Mono : 6 with 2 AUX Send, Pan Pot
 - Stereo : 4 with 2 Aux Send, Balance Control
 - Gain Selector Switch : -20dB, -10dB, +4dB
 - Common : 3 Band Equalizer(-12dB), PFL On/Off Switch
 - Output Selector Switch : Stereo, 1/2, 3/4
- [Output Section : Stereo, Bus 1, 2, 3, 4 Output
- [Display : 7 Dot Level Meter for 1, 2, 3, 4, L/R, PFL, Monitor
- [ON Switch(at Output), +24V Phantom Power
- [2 AUX Send and Stereo Return
- [Power Source : AC 100V-240V, 50/60Hz, DC 24V
- [Power Consumption : 30W
- [Weight : 8.3kg
- [Dimensions : 482(W)X177(H)X280(D)mm

R

- [2 Channel 15 Band Equalizer
- [2/3 Octave 20Hz-20kHz, ± 12 dB
- [40Hz HPF 12dB/Octave
- [EQ Level Control
- [EQ ON/OFF Switch
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : 15W
- [Weight : 3.8kg
- [Dimensions : 482(W)X44(H)X280(D)mm

E

EQ-9152 GRAPHIC EQUALIZER

CE



- [1 Channel 31 Band Equalizer
- [1/3 Octave 20Hz-20kHz, ± 12 dB
- [40Hz HPF 12dB/Octave
- [EQ Level Control
- [EQ ON/OFF Switch
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : 10W
- [Weight : 3.6kg
- [Dimensions : 482(W)X44(H)X280(D)mm

P

EQ-9131 GRAPHIC EQUALIZER

CE




- [2 Channel 31 Band Equalizer
- [1/3 Octave 20Hz-20kHz, ± 12 dB
- [40Hz HPF 12dB/Octave
- [EQ Level Control
- [EQ ON/OFF Switch
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : 20W
- [Weight : 5kg
- [Dimensions : 482(W)X88(H)X280(D)mm

T

EQ-9231 GRAPHIC EQUALIZER

CE

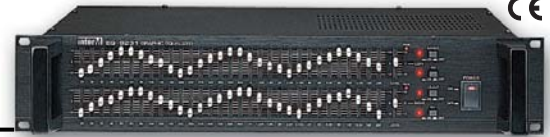

- [5 Band Parametric Equalizer with Level Control and Band On/Off Switch
- [Bandwidth Control : 0.08-2Octave
- [Connector : Balanced 1/4", XLR In/Out per Channel
- [Ground Selector : Frame/Float
- [Indicator : Band On/Off, Peak, Power On/Off LED
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : 10W
- [Weight : 5kg
- [Dimensions : 482(W)X44(H)X280(D)mm

K

PEQ-9115 PARAMETRIC EQUALIZER

CE



- [Dual Channel Compressor Limiter with Noise Gate
- [Threshold, Ratio, Level Control
- [Attack, Release time Control
- [Hard and soft knee function switch
- [Fully independent Gate with threshold, rate Control
- [In/Out display Switch
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : 14W
- [Weight : 3.4kg
- [Dimensions : 482(W)X44(H)X280(D)mm

C

CN-9102

DUAL CHANNEL COMPRESSOR LIMITER WITH NOISE GATE

CE



- [Chime : UP & DOWN, 2 Tone, Westminster
- [Siren : Constant & Wavy
- [Wired Remote Control Available
- [Power Source : DC 24V
- [Weight : 2.8kg
- [Dimensions : 482(W)X44(H)X280(D)mm

A

PE-9103(A) CHIME & SIREN

CE



R

PS-9116/9116 I SPEAKER SELECTOR



E

- [16 Zone Speaker Selector : All, Group 1, Group 2, CH 1-16
- [Operating Mode Indicator per Each Switch
- [Remote Control Terminal : All, Group 1 & 2(PS-9116 only)
- [2 Input Channel (PS-9116 only)
- [Power Source : DC 24V
- [Weight : PS-9116 : 3.6kg, PS-9116 I : 4.2kg
- [Dimensions : 482(W)X44(H)X280(D)mm

EP-9216 EMERGENCY PANEL



P

- [Auto Fire Alarm System
- [External Auto Announcement Available with Voice File
- [Function Test Switch
- [Output Level Control
- [Power Source : DC 24V
- [Weight : 4kg
- [Dimensions : 482(W)X88(H)X280(D)mm

ES-9116 EMERGENCY SWITCHER



T

- [Speaker Selector : All, CH 1-16
- [Auto Fire Sensing and Announcement at Designated Zone
- [Display : Selector Switch ON/OFF
- [Extension with Other Switcher Available
- [Power Source : DC 24V
- [Weight : 3.2kg
- [Dimensions : 482(W)X44(H)X280(D)mm

PX-9116 MATRIX



K

- [Priority Control : Emergency, Timer, Remote 1, Remote 2, Main
- [Display : Prior Mode LED
- [Two and Three Wire System
- [Extension with Other Matrix Available
- [Power Source : DC 24V
- [Weight : 3.4kg
- [Dimensions : 482(W)X44(H)X280(D)mm

RG-9116 RELAY GROUP



C

- [16 CH Speaker Line Switching,
- [Display : Broadcasting Status
- [Two and Three wire System Broadcasting
- [Power Source : DC 24V
- [Weight : 3.8kg
- [Dimensions : 482(W)X44(H)X280(D)mm

PA-9312/9324/9336 POWER AMPLIFIER



A

- [Output Power : 120W(RMS), 240W(RMS), 360W(RMS) <1% THD
- [Protection : Thermal, PC Limiter
- [Balanced Input(XLR)
- [400Hz High Pass Filter
- [Ground Selector : Frame/Float
- [Input Level Control : -12dB, -0dB(1V)
- [Fan Forced Cooling System
- [Power Source : AC 100V-240V, 50/60Hz, DC 24V
- [Power Consumption :
PA-9312:300W, PA-9324:680W, PA-9336:1000W
- [Weight : PA-9312 : 14kg, PA-9324 : 19kg, PA-9336 : 21kg
- [Dimensions : 482(W)X132(H)X280(D)mm

R

- Output Power : 120W(RMS)/Channel <1% THD
- Protection : Thermal, PC Limiter
- Balanced Input(XLR), Link
- 400Hz High Pass Filter
- Ground Selector : Frame/Float
- Fan Forced Cooling System
- Power Source : AC 100V-240V, 50/60Hz, DC 24V
- Power Consumption : 290W
- Weight : 20kg
- Dimensions : 482(W)X132(H)X280(D)mm

E

PA-2312 DUAL CHANNEL POWER AMPLIFIER

CE



- Output Power : 4Ω 1kHz : C-800 : 400W/CH
C-1200 : 600W/CH
8Ω Bridged Mono : C-800 : 800W
C-1200 : 1200W
- Built-In : Low-Cut Switch : Off/40Hz/80Hz
High-Cut Switch : Off/5kHz/10kHz
- Controls : Front : Power On/Off Switch, LED Indicator
Rear : Mode Selector Switch : Stereo/Bridged Mono,
Attenuator, Low Cut Switch, High Cut Switch
- T.H.D : 0.1%
- S/N : 95dB
- Input Sensitivity(8Ω, 1kHz) : 0.775Vrms
- Frequency Response(±0.5dB) : 10Hz~40kHz
- Protection : Turn On Delay, Thermal, DC Fault, PC Limiter
- Connectors : Input : Barrier Stip(Link), Output : Barrier Stip(Link)
- Power Source : AC 100V-240V, 50/60Hz
- Power Consumption : C-800 : 540W, C-1200 : 810W
- Weight : C-800 : 13.8kg, C-1200 : 18.4kg
- Dimensions : 482(W)X132(H)X369(D)mm

P

C-800/1200 CONTRACT SERIES AMPLIFIER

CE



- Rack System AC/DC Power Controller
- Protection : DC Overcurrent(Regulated Output)
- Outlet : 2 AC Unswitched, 9 AC Switched, 9 DC Unswitched
- Remote ON/OFF
- Emergency Battery Input
- Display : AC, DC Volt Meter
- Power Source : AC 100V-240V, 50/60Hz, DC 24V
- Power Consumption : 230VA
- Weight : 11kg
- Dimensions : 482(W)X132(H)X280(D)mm

T

PD-9359E POWER DISTRIBUTOR

CE



- Current Control by Automatic Charge
- Charge Current : DC 3A
- Charge Voltage : DC 27.3V Max
- Display : Volt, Ampere Meter
- Protection : Overcurrent, Overcharge
- Power Source : AC 100V-240V, 50/60Hz
- Power Consumption : 120VA
- Weight : 6.2kg
- Dimensions : 482(W)X88(H)X280(D)mm

K

PB-9207A BATTERY CHARGER

CE



- Rack System Temperature Controller
- Operation Selector : Manual, Auto, Operating Temperature
- Fan : 2 DC Operating
- Power Source : DC 24V
- Weight : 1.4kg
- Dimensions : 482(W)X132(H)X35(D)mm

C

PF-9302 AUTO BLOWER

CE



A

R

PO-9106 PROGRAM DISTRIBUTOR



E

- [1 Input, 6 Output by XLR Connectors
- [Level Control for Each In/Output
- [LED Display per Each In/Output
- [Power Source : AC 100V-240V, 50/60Hz, DC 24V
- [Power Consumption : 8W
- [Weight : 3.8kg
- [Dimensions : 482(W)X44(H)X280(D)mm

LM-9228 LINE MONITOR



P

- [Switch Selector Group 1, Group 2
- Group 1(Input CH 4, Output CH 4),
- Group 2(Input CH 4, Output CH 4)
- [Power Source : DC 24V
- [Weight : 7.5kg
- [Dimensions : 482 (W)X88(H)X280(D)mm

PG-9104 PROGRAM EXCHANGER



Y

- [Line input 4 : Line Output 4
- Emergency : Input, Timer Input, Remote Input 1, 2
- [Indicator : Em, Timer, Rm 1, Rm 2, Line
- [Power Source : DC 24V
- [Weight : 5kg
- [Dimensions : 482(W)X44(H)X280(D)mm

AMX-9280 AUTO MIC CONTROLLER



T

- [Input : 8 CH XLR Balanced
- [Threshold Control : Gate Mode Switch
- [Level Control : Channel Gain, AUX Level(Audio Link In/Out)
- [+48V Phantom Power
- [Power Source : AC 100V-240V, 50/60Hz
- [Power Consumption : 28W
- [Weight : 6kg
- [Dimensions : 482(W)X88(H)X280(D)mm

TB-9116/9232 TERMINAL BOARD




K

- [16/32 CH for Rack and External Line
- [Weight : TB-9116 : 3kg, TB-9232 : 4.2kg
- [Dimensions : TB-9116 : 482(W)X44(H)X280(D)mm
- TB-9232 : 482(W)X88(H)X280(D)mm

BP-9100/9200/9300

BLANK VENT PANELS

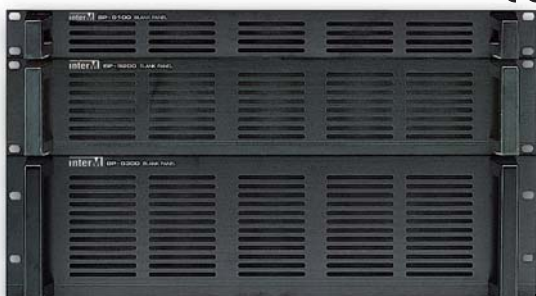

C

A

R

- [Weight : BP-9100 : 320g, BP-9200 : 540g, BP-9300 : 760g
- [Dimensions : BP-9100 : 482(W)X44(H)X28(D)mm
- BP-9200 : 482(W)X88(H)X28(D)mm
- BP-9300 : 482(W)X132(H)X28(D)mm

COLUMN SPEAKERS

IN - DOOR
(IVORY/GRAY)



CS-710/720/730/740
(10W/20W/30W/40W)

OUT - DOOR



CS-810/820/830/840
(10W/20W/30W/40W)

IN - DOOR



CS-910/920/930/940
(10W/20W/30W/40W)

CEILING SPEAKERS



CS-03 (3W) CS-10 (10W) CS-45 (3W) CS-44 (3W)



MS-03(3W)/05(5W) SP-03 GP-03
WITH SP-03 OR GP-03



CS-03A (3W) CS-05W(GRAY) (5W)



MS-15/MS-30
(15W/30W)
8" COAXIAL CONE

WALL SPEAKERS



SWS-03A(BR, IV) (3W) SWS-10A(BR, IV) (10W)

MIC AMPLIFIER



PS-30(30W)

FASHION SPEAKERS



FS-52 (50W) FS-30/60/100 (30W/60W/100W) MAGIC-60 (50W) MS-50BT (20W) MS-50WT (20W)

BRACKET(FASHION)



FSB-1 FSB-2


PAGING HORN SPEAKERS



HS-20(20W) HS-30(30W) HS-50(50W) HS-20RT(20W) HS-30RT(30W) HS-40RT(40W)

S
R
E
K
A
E
P
S

CLEAR HORN SPEAKER

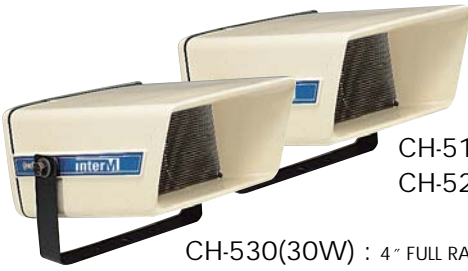

CH-510(10W) : 4" FULL RANGE
CH-522(20W) : 4" COAXIAL CONE

CH-530(30W) : 4" FULL RANGE
CH-532(30W) : 4" COAXIAL CONE

ATTENUATOR UNIT



ATT-01
(1W)



ATT-03
(3W)



ATT-30
(30W)

MICROPHONES

DYNAMIC TYPE



MD-650A



MD-750



MD-850



MD-950

CONDENSER TYPE



MC-1000

RM-01

REMOTE
MICROPHONE

- [Unidirectional Dynamic Microphone
- [Remote Chime Switch
- [Mic ON/OFF Switch
- [2 Push Buttons for Easy Operation
- [Weight : 1.4kg
- [Dimensions : 90(W)X45(H)X133(D)mm



RM-916

REMOTE PAGING MIC AMPLIFIER

- [Output : Program Output (Balanced)
- [Input : AUX (Unbalanced)
- [16 Speaker Control Terminal & Switch
- [All Call Switch
- [4 Tone Chime for Announcement
- [Mute Switch
- [Power Source : DC 24V
- [Weight : 1.2kg (Without Microphone)
- [Dimensions : 245(W)X60(H)X205(D)mm



STAND



TS-1



FS-2



BS-3

ENGINEERING RACK CABINET SERIES



PA-231D



PA-271D



PA-331D



PA-391D

- [Dimensions : PA-151D : 585(W) x 885(H) x 585(D)mm
- PA-231D : 585(W) x 1240(H) x 585(D)mm
- PA-271D : 585(W) x 1420(H) x 585(D)mm
- PA-331D : 585(W) x 1685(H) x 585(D)mm
- PA-391D : 585(W) x 1955(H) x 585(D)mm

www.inter-m.com



TABLE TYPE

RACK TYPE

SPEAKERS

MICROPHONES

Inter·M Corporation

OFFICE : 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA
TEL : 82-2-2289-8140~8
FAX : 82-2-2289-8149
E-mail : export@inter-m.com

distributed by :