


■DESCRIPTION

The V-1071B is a line amplifier module with level indicator that designed for use with the mixer frame.

■SPECIFICATIONS

| | |
|---|---|
| Power Requirement | 24 V DC |
| Current Consumption | 85 mA |
| Input Sensitivity | -20 dBV |
| Output Level | 0 dBV |
| Output Impedance | 600 Ω, balanced |
| Frequency Response | 30 Hz~20,000 Hz ± 1 dB |
| Distortion | Less than 0.3 % at 1 kHz |
| Tone Control | Bass : ±10 dB at 100 Hz Treble : ±10 dB at 10,000 Hz |
| Noise Level (Equivalent Input Noise) | -102 dBV (20 Hz~20,000 Hz) |
| Indicator | LED output level indicator |
| Controls | Output level control (Slide volume) Tone control |
| Connections | Inputs : 10-pin card connector Output/DC input : 5-pin DIN |
| Color | Black |
| Dimensions(W×H×D) | 40 (1.57")×129 (5.08")×212 (8.35") mm |
| Weight | 145 g (0.32 lb.) |

■APPEARANCE

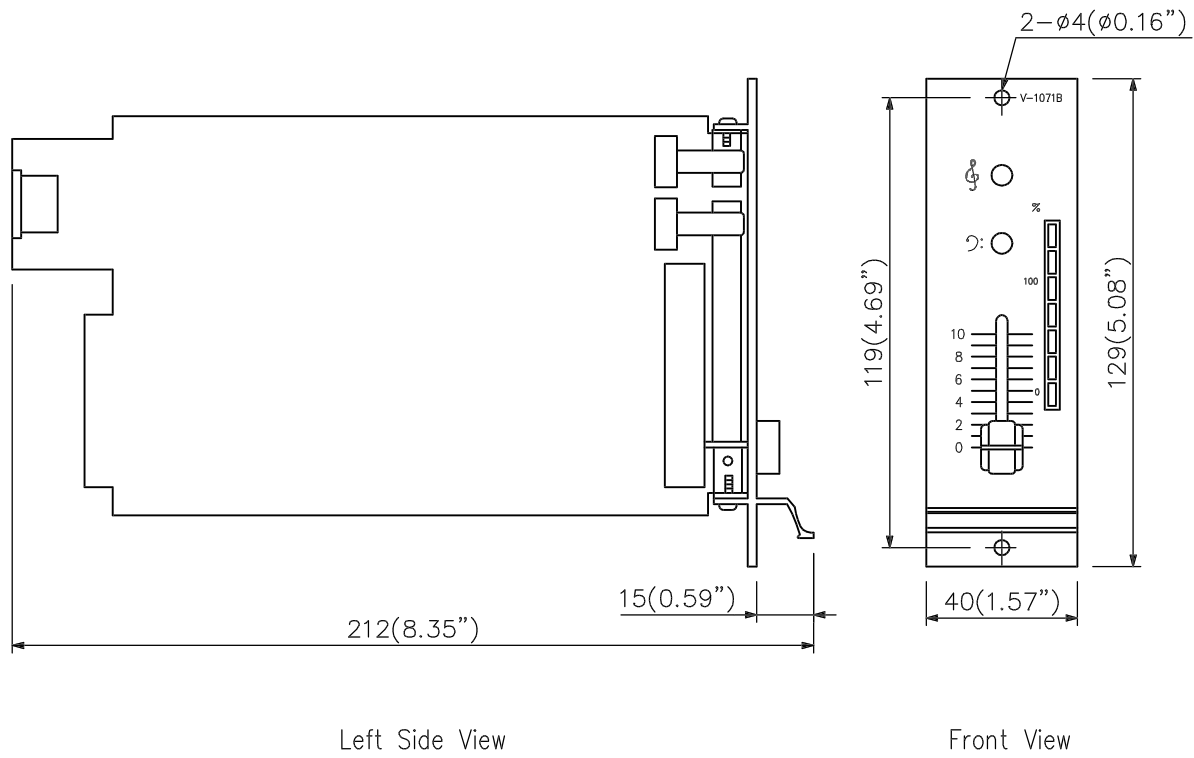

UNIT:mm SCALE:1/2