


■DESCRIPTION

The V-1072B is a line amplifier module with level indicator that designed for use with the mixer frame.

■SPECIFICATIONS

Power Requirement	24 V DC
Current Consumption	85 mA
Input Sensitivity	-20 dBV
Output Level	0 dBV
Output Impedance	600 Ω, balanced
Frequency Response	30~20,000 Hz ± 1 dB
Distortion	Less than 0.3 % at 1 kHz
Tone Control	Bass : ±10 dB at 100 Hz Treble : ±10 dB at 10,000 Hz
Noise Level (Equivalent Input Noise)	-102 dBV (20 Hz~20,000 Hz)
Indicator	LED output level indicator
Controls	Output level control Tone control
Connections	Inputs : 10-pin card connector Output/DC input : 5-pin DIN
Color	Black
Dimensions(W×H×D)	40 (1.57")×129 (5.08")×212.8 (8.35") mm
Weight	145 g (0.32 lb.)

■APPEARANCE

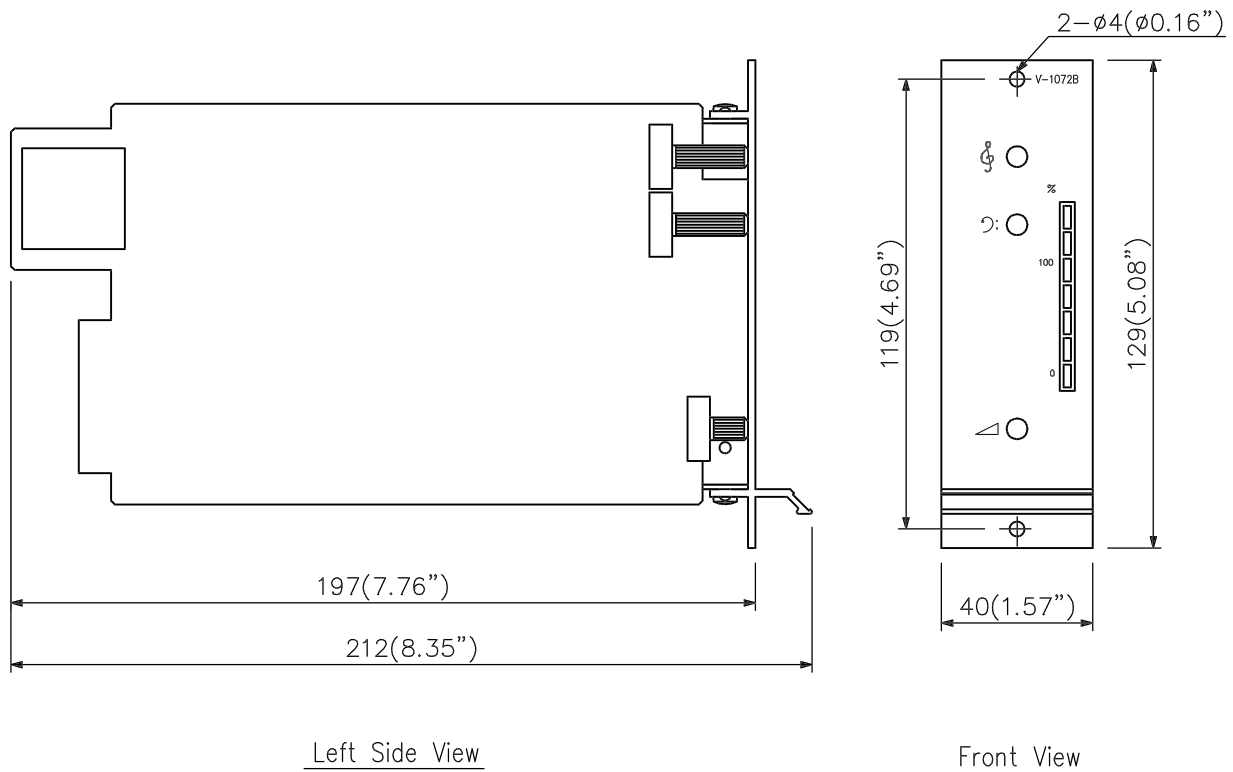

UNIT:mm SCALE:1/2