

## PAM-TUNER/COMPACT DISC MODULE/DECK



### FEATURES

#### PAM-T

- This unit is the PAM Series Module.
- The total 30 memory address in system can memorize the frequency of broadcasting.
- You can use the desirable frequency conveniently.
- Tuning Range(FM:87.5~108MHz, AM:522~1620KHz).

#### PAM-CDA

- This unit is the PAM Series Module.
- DIN-sized mobile CD player and detachable control panel.
- Shuffle play function to randomly select tracks.
- Various selection functions(track number search, track scan, repeat, random, music scan).

#### PAM-D

- DECK MODULE OF PAM SERIES AMPLIFIER  
To use with PAN series amplifier(optional).
- AUTO REVERSE TO ALLOW CONTINUOUS PLAY BACK  
This cassette deck employs high reliability auto reverse cassette deck for endless cassette playback.
- FRONT LOADING TYPE  
For the convenient use of system adapted front loading type.

### SPECIFICATIONS

#### PAM-T

\*0dB=0.775Vrms

##### ELECTRICAL

- Tuning Range.....FM:87.5~108MHz, AM:522~1620kHz
- Antenna Input.....FM:300Ω BAL, 5Ω UNBAL  
AM:Low Impedance
- Usable Sensitivity .....FM:2 μV, AM:12 μV
- S/N .....FM:60dB, AM:50dB

##### GENERAL

- Weight.....1.5kg
- Dimensions .....184(W) × 55(H) × 93(D)mm

#### PAM-CDA

##### ELECTRICAL

- S/N(At rated transformer output, 1kHz).....70dB
- T.H.D(At rated transformer output, 1kHz).....0.1%
- Frequency Range(At rated transformer output)  
.....100Hz~20kHz, ±3dB
- Mechanism Life Time.....2000H(over)

##### GENERAL

- Weight.....2.5kg
- Dimensions.....184(W) × 55(H) × 194(D)mm

#### PAM-D

##### ELECTRICAL


- S/N .....45dB
- T.H.D .....3%
- Frequency Response.....100Hz~6.3kHz
- Tape .....4.76m/sec

##### GENERAL


- Power Source .....+18V(from PAM AMP)
- Weight.....950g
- Dimensions.....184(W) × 55(H) × 194(D)mm

# PAM-TUNER/CDA/DECK


PAM-TUNER

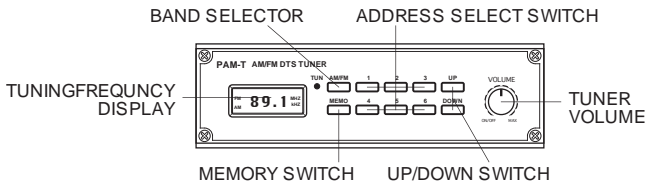

PAM-DECK

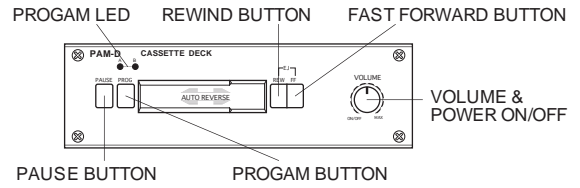

PAM-CDA

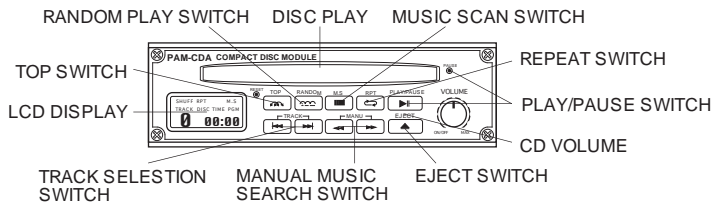

## BLOCK DIAGRAM

