

POWER AMPLIFIER 360W

PA-3640VB

■DESCRIPTION

The PA-3640VB power amplifier can be used for rack-mount application.


■SPECIFICATIONS

* 0 dB = 1 V

| Power Source | 230/240 V AC, 50/60 Hz 24 V DC |
|--------------------|---|
| Power Consumption | 780 VA (at rated output) |
| Output Power | 360 W |
| Inputs | 2 Program inputs (parallel) 0 dB*, 100 kΩ, balanced |
| | 2 Priority inputs (parallel) 0 dB*, 100 kΩ, balanced |
| Output and | 100 V/27.8 Ω, 50 V/6.9 Ω |
| Load Impedance | |
| S/N Ratio | Over 80 dB |
| Distortion | Under 1% (at rated output f = 1 kHz) |
| Indicators | Green LED lamp for power indicator. |
| | Red LED lamp for priority indicator. |
| Frequency Response | 40 - 16,000 Hz ±3 dB (at 1/3 rated output) |
| Finish | Panel: Surface—treated steel plate, black, 30% gloss, paint |
| Dimensions | 483 (W) × 177 (H) × 1315.5 (D) mm |
| Weight | 22.2 kg |
| Accessory | Rack mounting screw (with washer) 4, Fuse 2, Terminal cover 2 |


APPEARANCE



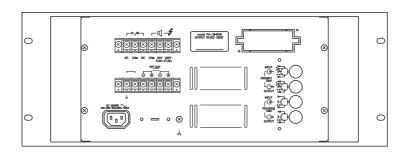

315.5

Front View

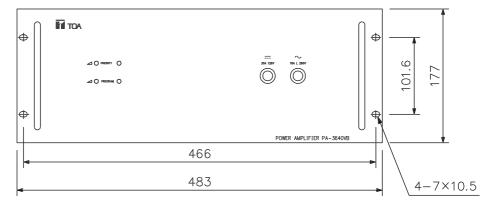

Ш

Side View

UNIT: mm SCALE: 1/5